

# RELAY SOCKETS FOR 14 PIN FRP3145 & TRP314x 4PCO RELAYS

PRODUCT GROUP  
**H**


**TYPES: PYF-14AEW, PYF-14BE, PYF-14BE/3**

## ■ PYF-14AEW

Our most popular 14 pin socket, complete with a fixed marker tab and a screwdriver release tab. **An optional wire retaining clip is also available, part number MHO.**

## ■ PYF-14BE & PYF-14BE/3


"High sided" 14 pin sockets with tunnel clamps. A triple deck version, the PYF-14BE/3 allows segregation of voltages, coil terminals being on one side with two A2 terminals. All changeover terminals on the opposite side. Both socket types have a removable marker tab and screwdriver release tab. **Retaining clips are also available for both versions, part number MS35**

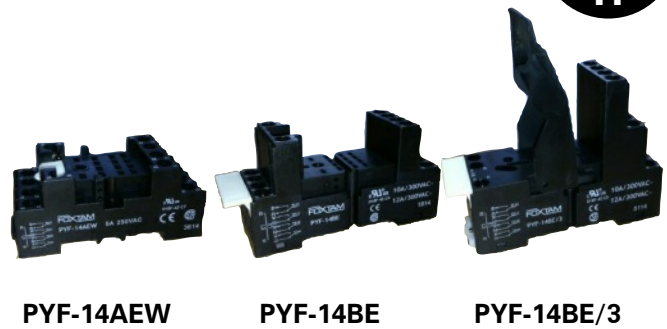

PYF-14AEW

PYF-14BE

PYF-14BE/3

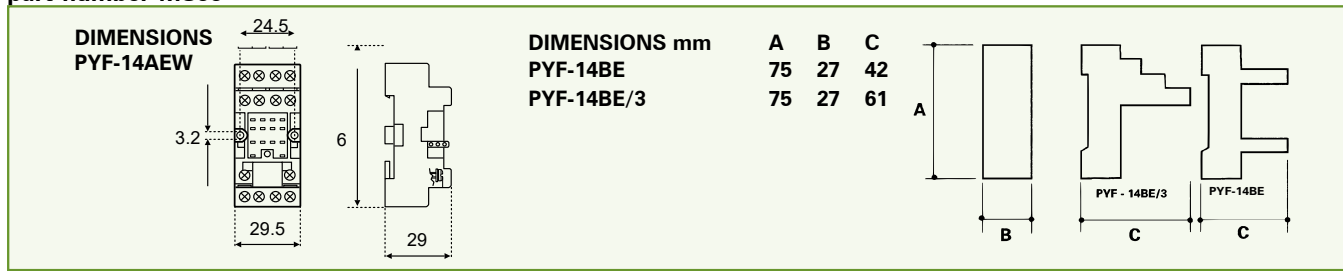


# RELAY SOCKETS FOR 8 PIN FRP3125 & TRP312x DPCO RELAYS

**TYPE: PYF-08AE**

## ■ DESCRIPTION

The FRP3125 & TRP312x relays can be utilised with the 14 pin socket, the two outer sets of terminals are used and of course the coil terminals. However, a dedicated 8 pin relay socket is available type PYF-08AE, this socket also has a higher current rating and is thus more desirable when switching the higher currents that the FRP3125 & TRP312x relays can switch. Retaining clips are supplied with each socket.




# DIN RAIL MOUNTED SOCKETS FOR 8 & 11 PIN RELAYS

**TYPES: CS083N (8 PIN) & CS113N (11 PIN)**

## ■ DESCRIPTION

Compact square black sockets, with protected terminals types CS083N & CS113N. The sockets have a screwdriver release tab and have captive clamps for ease of cable insertion. Up to 2 x 2.5mm cables can be accepted. The sockets are suitable for fork, ferule and ring terminal ends.

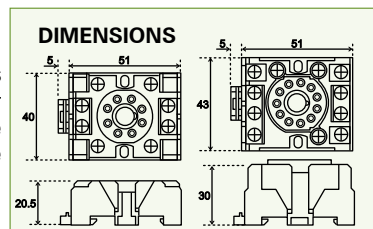

# DIN RAIL MOUNTED SOCKETS FOR 8 & 11 PIN RELAYS

**TYPES: PF-083BE (8 PIN) & PF-113BE (11 PIN)**

## ■ DESCRIPTION

Fully protected sockets with coil and common terminals at one end and the change overs pairs at the other end side by side, thus enabling very easy wiring changes and corrections. The terminals are rising style tunnel clamps, up to 2 x 2.5mm cables can be accepted. The sockets also have a white marking area. **An optional wire retaining clip is also available, part number MR28800**

