

FOX80.1

Moulded case current transformers, for primary currents from 400 Amps to 2000 Amps. With built in sliding sealable terminal covers.




FEATURES

- Bus-bar or foot mounted
- Built in sliding sealable terminal covers
- Transformer width 100mm
- Max conductor size 61mm dia.
- Max bus-bar size 80x10mm or 60x30mm
- 1 Amp or 5 Amp secondaries



P/No.	CLASS	VA
FOX80.1 400/5	1	5
FOX80.1 500/5	1	5
FOX80.1 600/5	1	5
FOX80.1 800/5	1	10
FOX80.1 1000/5	1	10
FOX80.1 1200/5	1	10
FOX80.1 1500/5	1	15
FOX80.1 1600/5	1	15
FOX80.1 2000/5	1	15

All of the above ratios are available as Class 0.5 and Class 0.2 to special order, please consult our sales office.

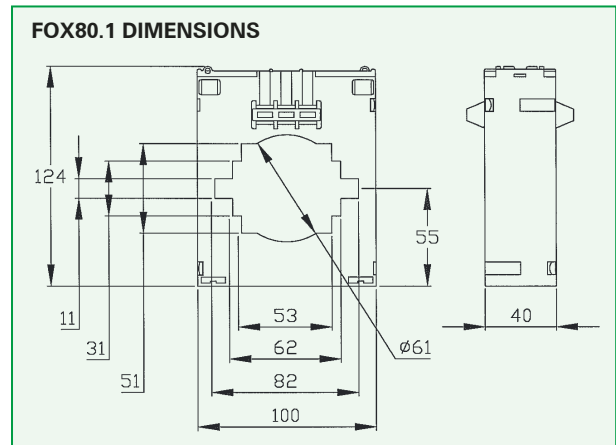

FOX100.3

Moulded case current transformers, for primary currents from 400 Amps to 4000 Amps. With built in sliding sealable terminal covers.

FEATURES

- Bus-bar or foot mounted
- Built in sliding sealable terminal covers
- Transformer width 135mm
- Max conductor size 85mm dia.
- Max bus-bar size 100x30mm or 80x50mm
- 1 Amp or 5 Amp secondaries



P/No.	CLASS	VA
FOX100.3 400/5	1	2.5
FOX100.3 500/5	1	2.5
FOX100.3 600/5	1	5
FOX100.3 800/5	1	5
FOX100.3 1000/5	1	10
FOX100.3 1200/5	1	10
FOX100.3 1500/5	1	15
FOX100.3 1600/5	1	15
FOX100.3 2000/5	1	15
FOX100.3 2500/5	1	15
FOX100.3 3000/5	1	15
FOX100.3 4000/5	1	15

All of the above ratios are available as Class 0.5 and Class 0.2 to special order, please consult our sales office.

