


FOX.SC812

FEATURES

- Protected terminals
- Integral cable / bus-bar pinch screws
- Primaries from 250 Amps to 3000 Amps
- Max aperture size 82x122mm
- Max overall dimensions 155x198mm
- Class 1 (class 0.5 on request)
- 1 Amp or 5 Amp secondaries



P/No.	CLASS	VA
FOX.SC812 250/5	1	2.5
FOX.SC812 300/5	1	3.75
FOX.SC812 400/5	1	3.75
FOX.SC812 500/5	1	5
FOX.SC812 600/5	1	7.5
FOX.SC812 800/5	1	10
FOX.SC812 1000/5	1	15
FOX.SC812 1200/5	1	30
FOX.SC812 1500/5	1	45
FOX.SC812 1600/5	1	45
FOX.SC812 2000/5	1	45
FOX.SC812 2500/5	1	45
FOX.SC812 3000/5	1	45

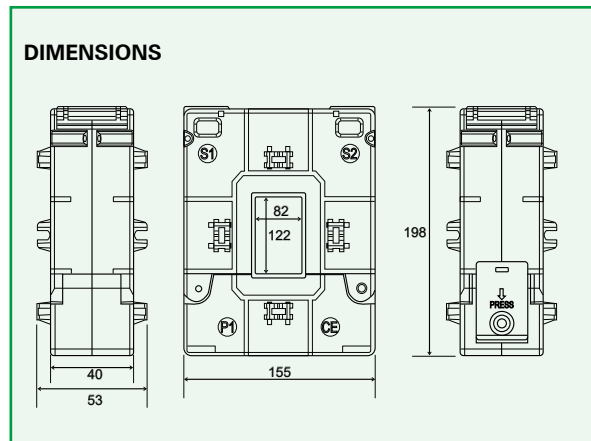

1 Amp secondaries available to special order, along with class 0.5 on some ratios, please consult our sales office.


FOX.SC816

FEATURES

- Protected terminals
- Integral cable / bus-bar pinch screws
- Primaries from 1000 Amps to 5000 Amps
- Max aperture size 82x162mm
- Max overall dimensions 195x245mm
- Class 1 (class 0.5 on request)
- 1 Amp or 5 Amp secondaries



P/No.	CLASS	VA
FOX.SC816 1000/5	1	20
FOX.SC816 1200/5	1	20
FOX.SC816 1500/5	1	30
FOX.SC816 1600/5	1	30
FOX.SC816 2000/5	1	30
FOX.SC816 2500/5	1	30
FOX.SC816 3000/5	1	45
FOX.SC816 4000/5	1	45
FOX.SC816 5000/5	1	45

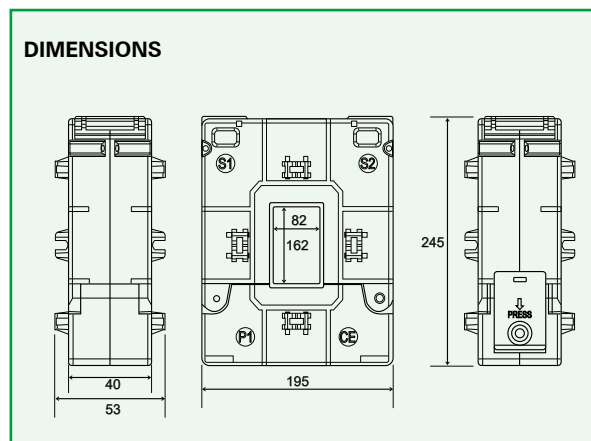

1 Amp secondaries available to special order, along with class 0.5 on some ratios, please consult our sales office.