


DC SHUNTS (* 60mV SECONDARY AS STANDARD)

TYPES: UA-SHT & NST



TYPE A

- Primary current 10 Amps to 200 Amps
- Standard accuracy \pm -1% (0.5% & 0.25% on request)
- Specify with model the secondary: 50mV, 60mV*, 75mV, 100mV


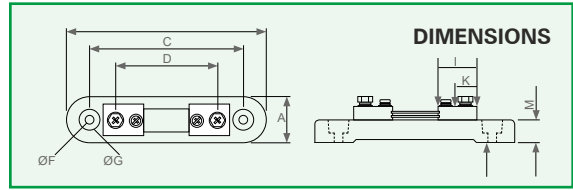


MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M
UA-SHT-A-10A/20A/30A/40A/50A/60A/80A/100A/150A	31	136	110	73	20	6	12	17	32	13	21	5	17
UA-SHT-A-200A	31	136	110	67	20	6	12	17	29	15	-	-	17

NST-30

- Primary current 250 Amps to 600 Amps
- Standard accuracy \pm -1% (0.5% & 0.25% on request)
- Specify with model the secondary: 50mV, 60mV*, 75mV, 100mV



MODEL	A	B	C	D	E
NST-30-250A	41	88	115	10	12
NST-30-300A	35	88	116	12.5	20
NST-30-400A	44	86	116	12.5	20
NST-30-500A	55	88	116	12.5	20
NST-30-600A	60	90	125	12.5	21

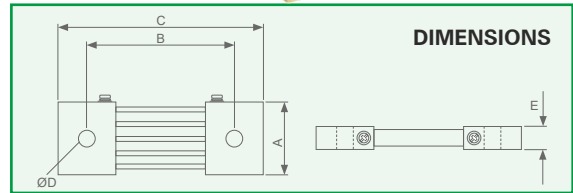

NST-40

- Primary current 800 Amps to 1500 Amps
- Standard accuracy \pm -1% (0.5% & 0.25% on request)
- Specify with model the secondary: 50mV, 60mV*, 75mV, 100mV

MODEL	A	B	C	D	E
NST-40-800A	70	125	90	12.5	20
NST-40-1000A	70	160	120	12.5	20
NST-40-1200A	85	160	120	12.5	20
NST-40-1500A	100	160	120	12.5	20

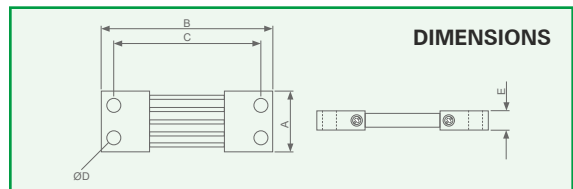

NST-50

- Primary current 2000 Amps to 5000 Amps
- Standard accuracy \pm -1% (0.5% & 0.25% on request)
- Specify with model the secondary: 50mV, 60mV*, 75mV, 100mV

MODEL	A	B	C	D	E	F
NST-50-2000A	103	230	205	55	12.5	50
NST-50-2500A	103	191	167	56	13.5	38
NST-50-3000A	103	280	238	65	15.0	64
NST-50-4000A	110	292	253	65	17.0	82
NST-50-5000A	128	315	271	65	17.0	106

