

# FOX40.1

Moulded case current transformers, for primary currents from 100 Amps to 800 Amps. With built in sliding sealable terminal covers.


## FEATURES

- Bus-bar or foot mounted
- Built in sliding sealable terminal covers
- Transformer width 60mm
- Max conductor size 28mm dia.
- Max bus-bar size 40x10mm or 30x20mm
- 1 Amp or 5 Amp secondaries



P/No.	CLASS	VA
FOX40.1 100/5	1	2.5
FOX40.1 150/5	1	2.5
FOX40.1 200/5	1	2.5
FOX40.1 250/5	1	2.5
FOX40.1 300/5	1	2.5
FOX40.1 400/5	1	5
FOX40.1 500/5	1	5
FOX40.1 600/5	1	5
FOX40.1 800/5	1	10

All of the above ratios are available as Class 0.5 to special order, please consult our sales office.

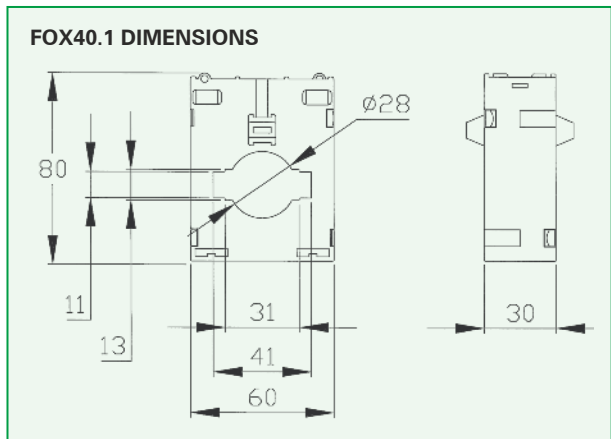

# FOX50.1

Moulded case current transformers, for primary currents from 250 Amps to 1200 Amps. With built in sliding sealable terminal covers.

## FEATURES

- Bus-bar or foot mounted
- Built in sliding sealable terminal covers
- Transformer width 70mm
- Max conductor size 41mm dia.
- Max bus-bar size 50x10mm or 40x30mm
- 1 Amp or 5 Amp secondaries



P/No.	CLASS	VA
FOX50.1 250/5	1	2.5
FOX50.1 300/5	1	2.5
FOX50.1 400/5	1	5
FOX50.1 500/5	1	5
FOX50.1 600/5	1	5
FOX50.1 800/5	1	10
FOX50.1 1000/5	1	15
FOX50.1 1200/5	1	15

All of the above ratios are available as Class 0.5 to special order, please consult our sales office.

